


WEAVED SCREEN FABRIC WITH VARIED OPENNESS
FACTORS TO REDUCE GLARE AND MANAGE DAYLIGHT

SPECIFICATION

BLIND TYPE	ROLLER
FUNCTION	SCREEN
OPENNESS FACTOR	5%
CLEANING	WASHABLE
WEIGHT	410 G/M2 APPROX
FIRE RETARDANCY	C1
COMPOSITION	70% PVC / 30% POLYESTER
WIDTH	2000MM, 2500MM AND 3000MM

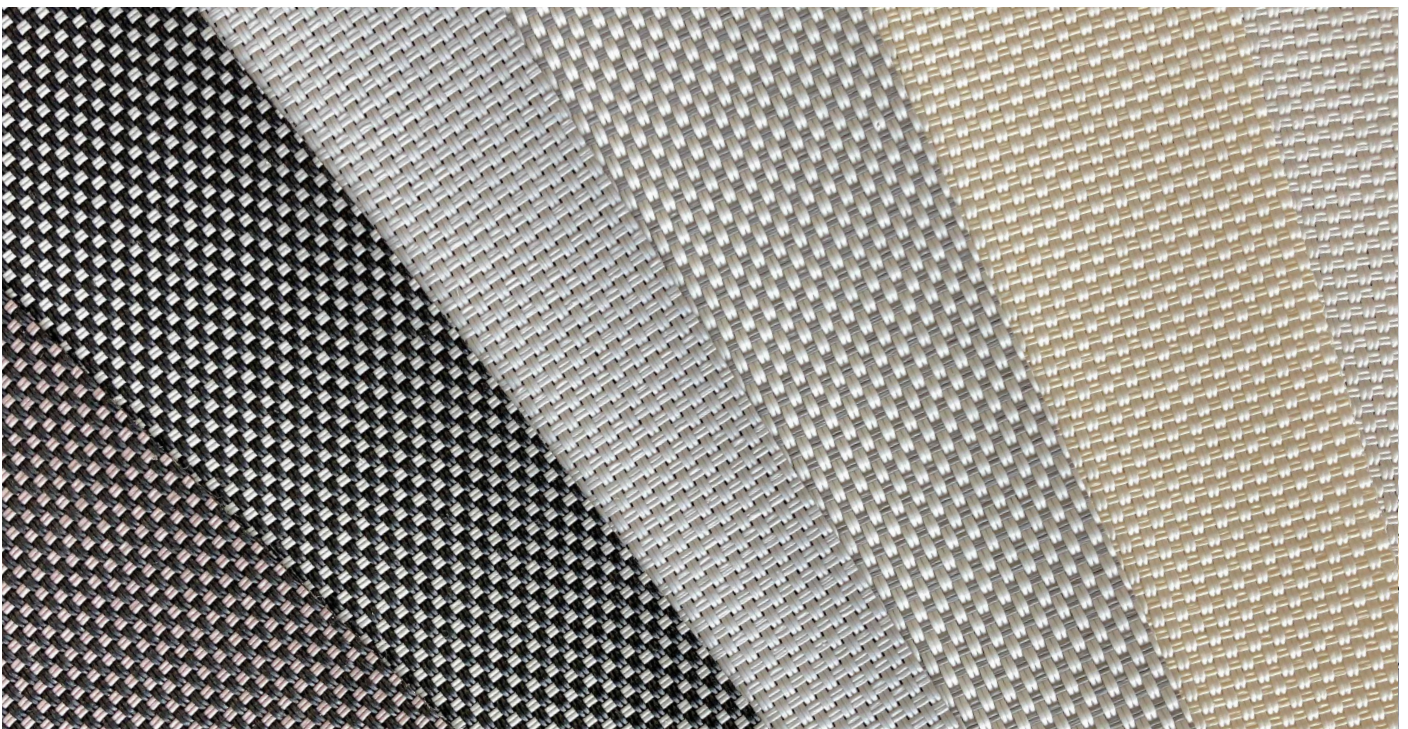


COLOURS



White



Shell

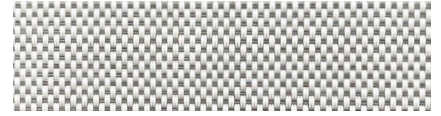

Blizzard



Shield



Lead



Soot

TECHNICAL INFORMATION

COLOUR	HEAT			LIGHT		
	T	R	A	T	R	A
White	29	61	11	26	70	4.8
Shell	27	54	19	22	62	16
Blizzard	17	38	45	13.3	42	45
Lead	18	34	45	14	35	51
Soot	7.6	3.1	89	7.7	3.1	89
Shield	9.9	12	78	9.2	12	78

T% : Transmittance

R% : Reflectance

A% : Absorption

THICKNESS: 0.55 MM

OPENNESS FACTOR: 5%

COLOUR FASTNESS: 7

UV SCREEN: 90%

TENSILE STRENGTH WARP: 22%

TENSILE STRENGTH WEFT: 23%

TEAR STRENGTH WARP: 16.0 DAN

TEAR STRENGTH WEFT: 16.0 DAN