


SCREEN FABRIC WITH A REFLECTIVE BACKING FOR
IMPROVED HEAT AND LIGHT CONTROL

SPECIFICATION


BLIND TYPE	ROLLER
FUNCTION	SCREEN
OPENNESS FACTOR	3%
CLEANING	WIPE CLEAN WITH DAMP SPONGE
WEIGHT	320 G/M ² APPROX
FIRE RETARDANCY	M1 / NF P 92-507 - CLASS B1 / DIN 4102
COMPOSITION	PES (35%) PVC (65%)
COLOUR FASTNESS	MIN GRADE 7 ISO105 B 02
THICKNESS	0.45MM APPROX

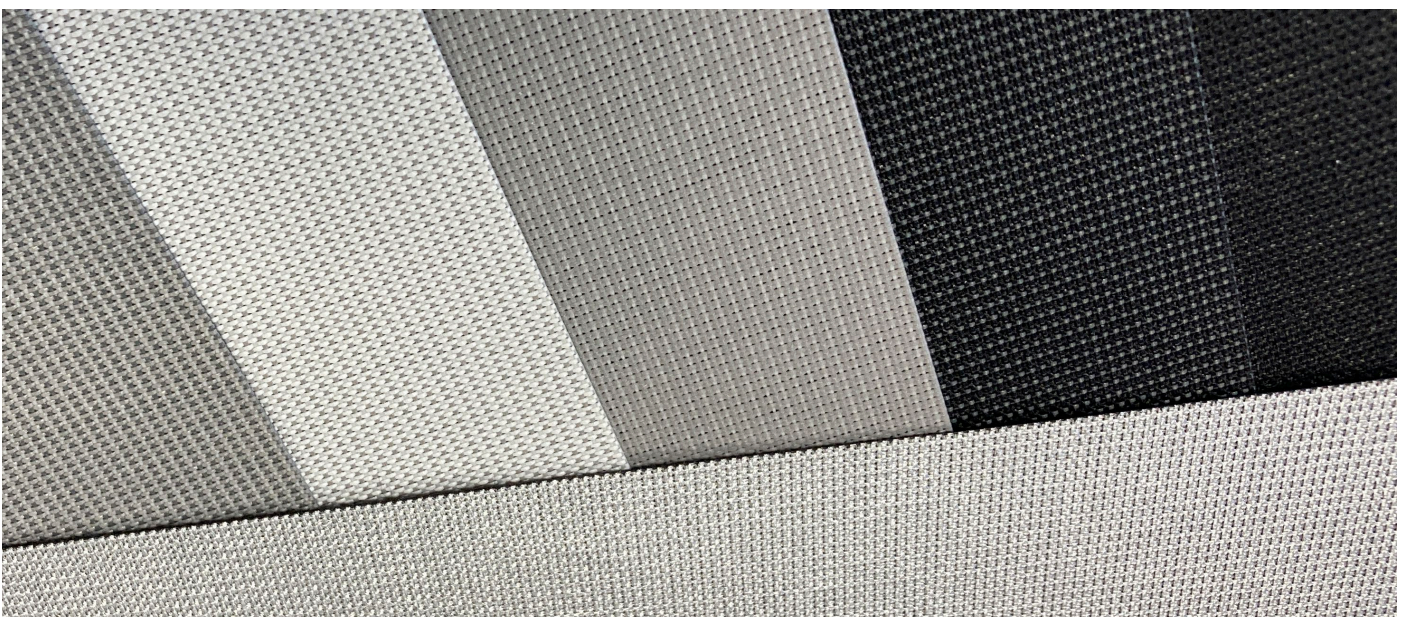

COLOURS




White

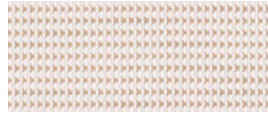


White /
Moccasin



White / Grey

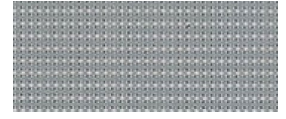


Grey / Light
Grey

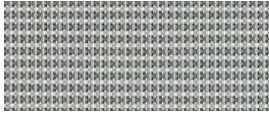

Grey / Dim
Grey



Charcoal /
Apricot

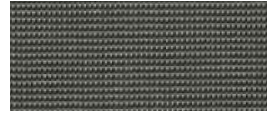

Charcoal / Grey



Charcoal

TECHNICAL INFORMATION

COLOUR	BACK SIDE		BACK SIDE		EN 14501
	AS	RS	TS	TV	S-C
White	24	72	4	4	0.33
White / Moccasin	25	71	4	4	0.34
White / Grey	25	72	3	5	0.33
Grey / Light Grey	26	70	4	4	0.34
Grey / Dim Grey	26	70	4	5	0.34
Charcoal / Apricot	25	72	3	4	0.33
Charcoal / Grey	25	72	3	5	0.33
Charcoal	24	72	4	4	0.33

AS% : Absorption

RS% : Reflectance

S-C : Shading Co-efficient

TS% : Transmittance

TV% : Spectrum