


WEAVED SCREEN FABRIC WITH VARIED OPENNESS
FACTORS TO REDUCE GLARE AND MANAGE DAYLIGHT

SPECIFICATION

BLIND TYPE	ROLLER
FUNCTION	SCREEN
OPENNESS FACTOR	1%
CLEANING	WASHABLE
WEIGHT	480 G/M2 APPROX
FIRE RETARDANCY	C1
COMPOSITION	70% PVC / 30% POLYESTER
WIDTH	2000MM, 2500MM AND 3000MM

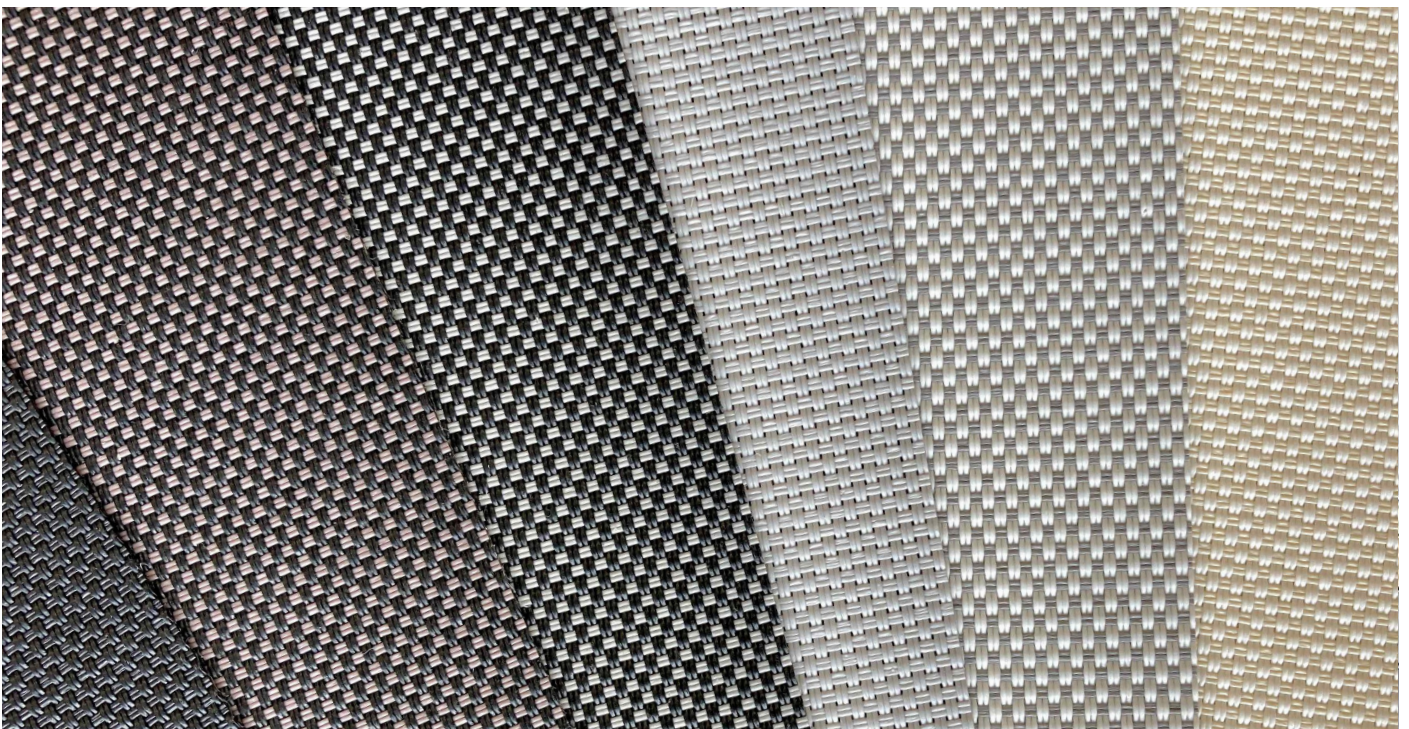


COLOURS



Crystal




Dune

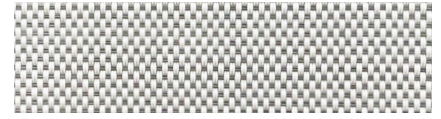

Misty



Lichen

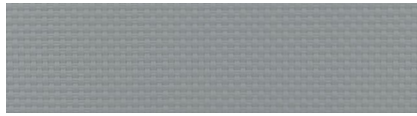

Drawn Steel



Carbon

TECHNICAL INFORMATION

COLOUR	HEAT			LIGHT		
	T	R	A	T	R	A
Crystal	24	64	12	20	74	5.4
Dune	17	55	27	12	63	25
Misty	12	43	44	9.2	50	40
Drawn Steel	9.1	35	56	4.1	36	60
Carbon	1.1	9.2	90	1.0	10	81
Lichen	0.2	3.4	96	0.2	3.4	96

T% : Transmittance

R% : Reflectance

A% : Absorption

THICKNESS: 0.68 MM

OPENNESS FACTOR: 1%

COLOUR FASTNESS: 7

UV SCREEN: 94%

TENSILE STRENGTH WARP: 22%

TENSILE STRENGTH WEFT: 23%

TEAR STRENGTH WARP: 17.5 DAN

TEAR STRENGTH WEFT: 17.5 DAN